




Treatment, Exposure and Evaluation of NOWA Test Samples in Denmark

CEN/TS 12037 (Lap-joints)

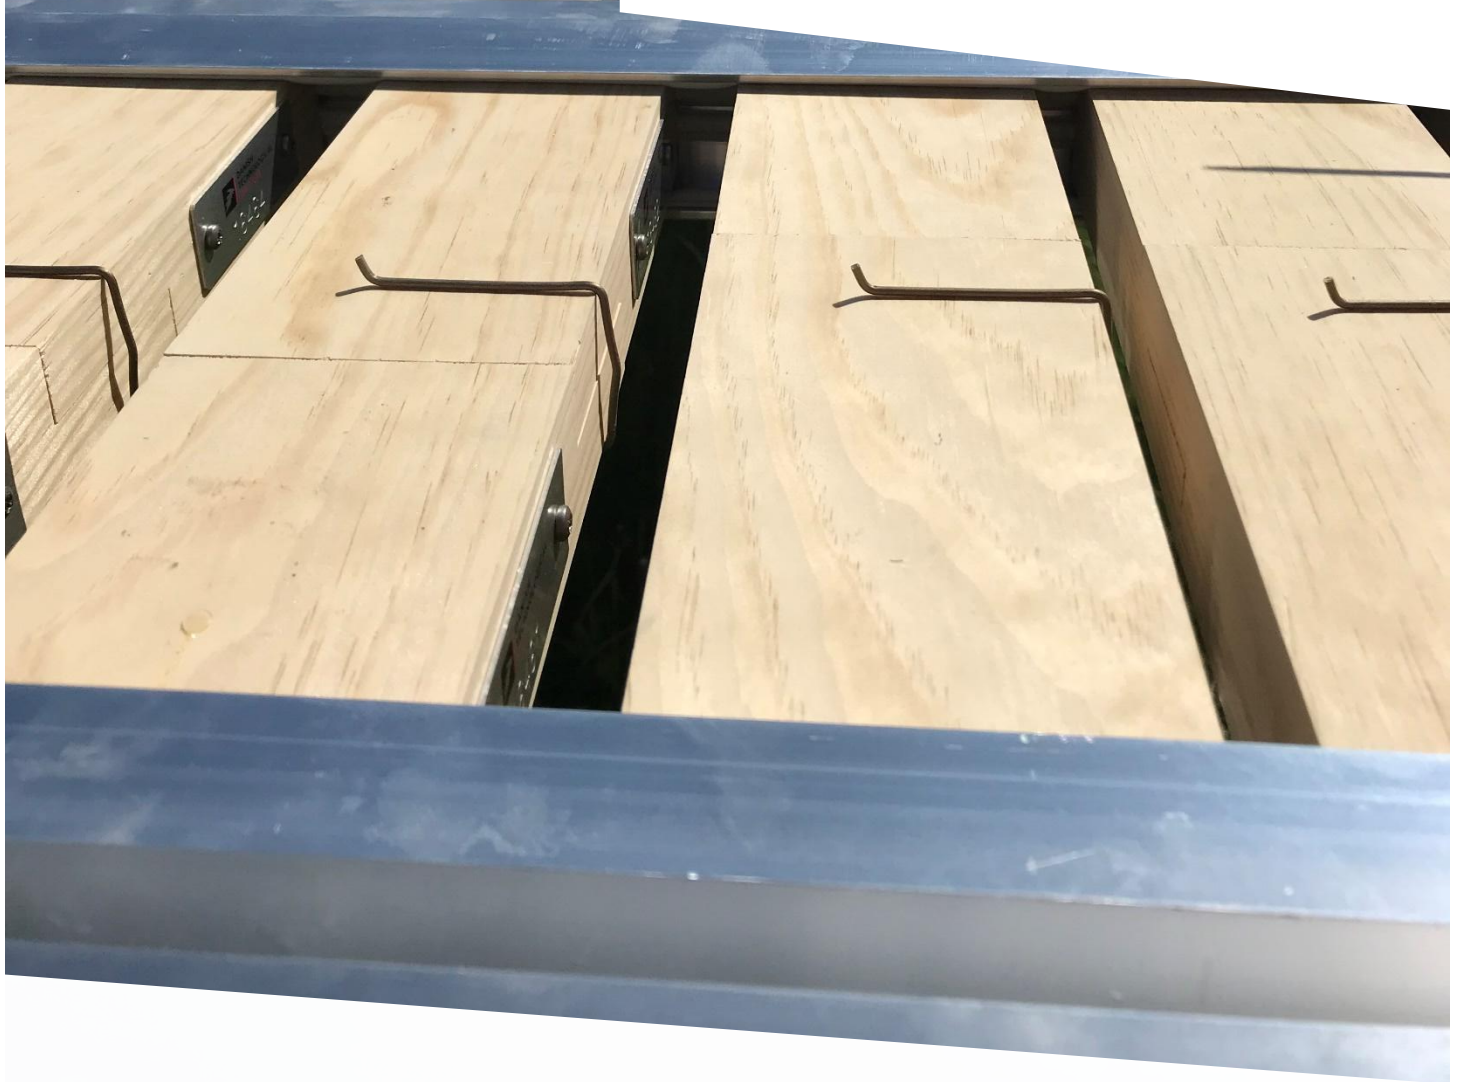

Title:

**Treatment, Exposure and Evaluation of NOWA Test Samples in Denmark
CEN/TS 12037 (Lap-joints)**

Client:

**OrganoWood AB
Linjalvägen 11
187 66 Täby
Sweden**

Prepared by:

Danish Technological Institute
Gregersensvej 4
DK-2630 Taastrup
Tlf. +45 7220 2000
Building and Construction
**Wood and Biomaterials
Andreas Wilfried Christof**

Quality Assurance:

Responsible: Andreas Wilfried Christof, tel. +45 7220, 1470, andc@dti.dk

Reference No.: 939295 (Treatment and Exposure), 939657 (Evaluation)

Version No.: 3

Date: 29-05-2026

The results from DTI's work in this report, i.e. analyses, assessments and instructions may only be used or reported in their entirety. It is not allowed to mention or refer to DTI or DTI's employees for advertising or marketing purposes unless DTI has granted its written consent in each case.

Table of Contents

1. Introduction	4
2. Background	4
3. Scope.....	4
4. Material, Impregnation and After Treatment.....	5
5. Evaluations	6
6. Annex	11

1. Introduction

As agreed with OrganoWood AB, Danish Technological Institute, Building and Construction has conducted preparation, treatment, installation and evaluation of NOWA test samples according to CEN/TS 12037. This report describes a part of the study and documents it with pictures.

2. Background

The technical standard CEN/TS 12037:2003 "Wood preservatives – Field test method for determining the relative protective effectiveness of a wood preservative exposed out of ground contact – Horizontal lap-joint method" determines the testing procedure for wood impregnations without ground contact. Samples of a certain size (30 cm x 8.5 cm x 3.8 cm) are treated and exposed horizontally above the ground. Each sample consists of two parts, mechanically held together (overlapping).

3. Scope

According to agreement with the client, the objective of the documentation is following:

- Overview over Samples and Treatment
- Overview over field installation
- Overview over the first evaluations

4. Material, Impregnation and After Treatment

There was used sapwood from Scots pine (*Pinus sylvestris* L.) for all the samples.

The samples according to CEN/TS 12037 were impregnated with the product called "NOWA", provided by the assignor. After that a heat treatment at 60 °C was applied:

Tabel 1: Overview over Impregnations and Heat Treatments for the CEN/TS 12037-samples (lap-joints)

Impregnation Product	After Treatment	Amount of samples (Danish test site)
NOWA	Heat Treatment "0" (max. 60 °C)	10
-	Heat Treatment "0" (max. 60 °C)	10
CCA	-	10
untreated	-	10
	Σ	40*

*Amount of whole lap-joints. Every lap-joint consists out of two parts.

The product contains Zirconium salt.

The samples were exposed after CEN/TS 12037:2003

DTI test site in Taastrup, Denmark: 19-05-2021

5. Evaluations

Tabel 2: Evaluation of the samples is performed after CEN/TS12037:2003.

Rating	Description	Definition
0	Sound	No evidence of decay.
1	Slight attack	Visible signs of decay, but no significant softening or weakening of the wood.
2	Moderate attack	Areas of decay (softened, weakened wood); typically not more than 3 cm ³ and to a depth of 2 to 3 mm.
2+	Moderate attack +	Approaching 3, severe attack.
3	Severe attack	Marked softening and weakening of the wood typical of fungal decay; distinctly more than 3 cm ³ affected and to a depth of 3 or 5 mm or 5 to 10 mm over a few cm ² .
3+	Severe attack+	Approaching 4, failure
4	Failure	Very severe and extensive rot, joint member(s) often capable of being easily broken.

In 2024, three annual evaluations were performed (see Tabel 3), the test is ongoing.

Tabel 3: Evaluations since installation

	DENMARK
1 year	28-04-2022
2 years	19-04-2023
3 years	27-03-2024
4 years	20-05-2025
5 years	04-05-2026

Tabel 4: Overview over Rating

Type of stake (Product used)	After Treatment (highest temperature) [°C]	Median of Decay Rating in Lap				
		Year 1	Year 2	Year 3	Year 4	Year 5
NOWA	60	0	0	0	0	0
no impregnation	60	0	1	1	1	1.5
References (CCA)	-	0	0	0	0	0
<i>untreated</i>	-	0	0	1	1	1

NOWA Test samples, after treatment: Heat treatment at max. 60 °C

Lap-joint no.	Decay ratings for external upper side surface (UD) Exposure period. Years					Decay ratings for external lower side surface (LD) Exposure period. Years					Decay ratings for joint surface (JD) Exposure period. Years				
	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year
16491-492	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16493-494	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16495-496	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16497-498	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16499-500	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16501-502	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16503-504	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16505-506	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16507-508	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16509-510	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
*Median	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Max	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Min	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Std dev	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

References: Heat Treatment at max. 60 °C

Lap-joint no.	Decay ratings for external upper side surface (UD) Exposure period. Years					Decay ratings for external lower side surface (LD) Exposure period. Years					Decay ratings for joint surface (JD) Exposure period. Years				
	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year
16511-512	0	0	1	1	1	0	0	1	1	1	0	1	2	1	2
16513-514	0	0	1	1	1	0	0	1	1	1	0	0	1	1	2+
16515-516	0	0	1	1	1	0	0	1	1	1	0	1	1	1	1
16517-518	0	0	1	1	1	0	0	1	1	1	0	1	1	1	2
16519-520	0	0	1	1	1	0	0	1	1	1	0	1	1	1	2
16521-522	0	0	1	1	1	0	0	1	1	1	0	1	1	1	1
16523-524	0	0	1	1	1	0	0	1	1	1	0	0	1	1	1
16525-526	0	0	1	1	1	1	1	1	1	1	0	0	1	1	1
16527-528	0	0	1	1	1	0	1	1	1	1	0	1	1	1	2+
16529-530	0	0	1	1	1	0	1	1	1	1	0	1	1	1	1
*Median	0	0	1	1	1	0	0	1	1	1	0	1	1	1	1.5
Max	0	0	1	1	1	1	1	1	1	1	0	1	2	1	2.5
Min	0	0	1	1	1	0	0	1	1	1	0	0	1	1	1
Std dev	0.00	0.00	0.00	0.00	0.00	0.32	0.48	0.00	0.00	0.00	0.00	0.48	0.32	0.00	0.66

References: CCA

Lap-joint no.	Ret. of preservative (kg/m ³)	Decay ratings for external upper side surface (UD) Exposure period. Years					Decay ratings for external lower side surface (LD) Exposure period. Years					Decay ratings for joint surface (JD) Exposure period. Years				
		1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year
16851-852	5.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16853-854	5.6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16855-856	5.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16857-858	5.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16859-860	5.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16861-862	5.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16863-864	5.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16865-866	5.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16867-868	5.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16869-870	5.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
*Median	5.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Max	5.6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Min	5.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Std dev	0.1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
* Median for the decay rating and mean for the retention of preservative.																

References: untreated

Lap-joint no.	Decay ratings for external upper side surface (UD) Exposure period. Years					Decay ratings for external lower side surface (LD) Exposure period. Years					Decay ratings for joint surface (JD) Exposure period. Years				
	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year	1 st year	2 nd year	3 rd year	4 th year	5 th year
16871-872	0	0	1	1	2	0	1	1	1	1	0	0	1	1	2
16873-874	0	0	1	1	1	0	1	1	1	1	0	0	0	1	1
16875-876	0	0	1	1	1	0	0	1	1	1	0	0	0	1	1
16877-878	0	0	1	1	1	0	0	0	1	1	0	0	0	1	1
16879-880	0	0	1	1	2	0	0	1	1	2	0	0	1	1	1
16881-882	0	0	1	1	1	0	1	1	1	1	0	1	1	1	2
16883-884	0	0	1	1	1	0	1	1	1	1	0	0	0	0	1
16885-886	0	0	1	1	1	0	1	1	1	1	0	1	1	1	1
16887-888	0	0	1	1	1	1	1	1	1	1	0	0	1	1	2
16889-890	0	0	1	1	1	0	0	0	1	1	0	0	1	1	1
*Median	0	0	1	1	1	0	1	1	1	1	0	0	1	1	1
Max	0	0	1	1	2	1	1	1	1	2	0	1	1	1	2
Min	0	0	1	1	1	0	0	0	1	1	0	0	0	0	1
Std dev	0.00	0.00	0.00	0.00	0.42	0.32	0.52	0.42	0.00	0.32	0.00	0.42	0.52	0.32	0.48

6. Annex



Figure 1: Exposure of the CEN/TS 12037 samples (lap-joints) at the DTI test site in Taastrup, Denmark (Photo from exposure in 2021)



Figure 2: Exposure of the CEN/TS 12037 samples (lap-joints) at the DTI test site in Taastrup, Denmark (left) and NOWA samples in detail, lap-joint clapped open (Photos from May 2026)